



## > SLN SERIES

### 中實回轉油壓缸附注水裝置

### ROTARY HYDRAULIC CYLINDER WITH COOLANT CONNECTION

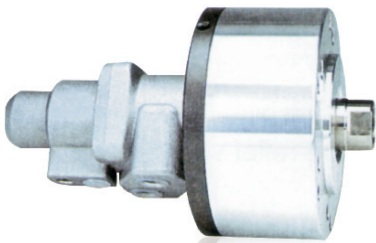

- ◎ 高速,注水型回轉油壓缸,可經由後端回轉繼手供給切削水。
- ◎ 安裝時可由後端鎖固之。
- ◎ To allow coolant to be feed from the rear end of the distributor through the rotating union.
- ◎ Can screw it from the rear end of the cylinder when mounting.
- ◎ 洩油孔配管務必單獨接回油壓槽, 以避免產生背壓。
- ◎ The drain port should be independently connected to oil tank to avoid back pressure.

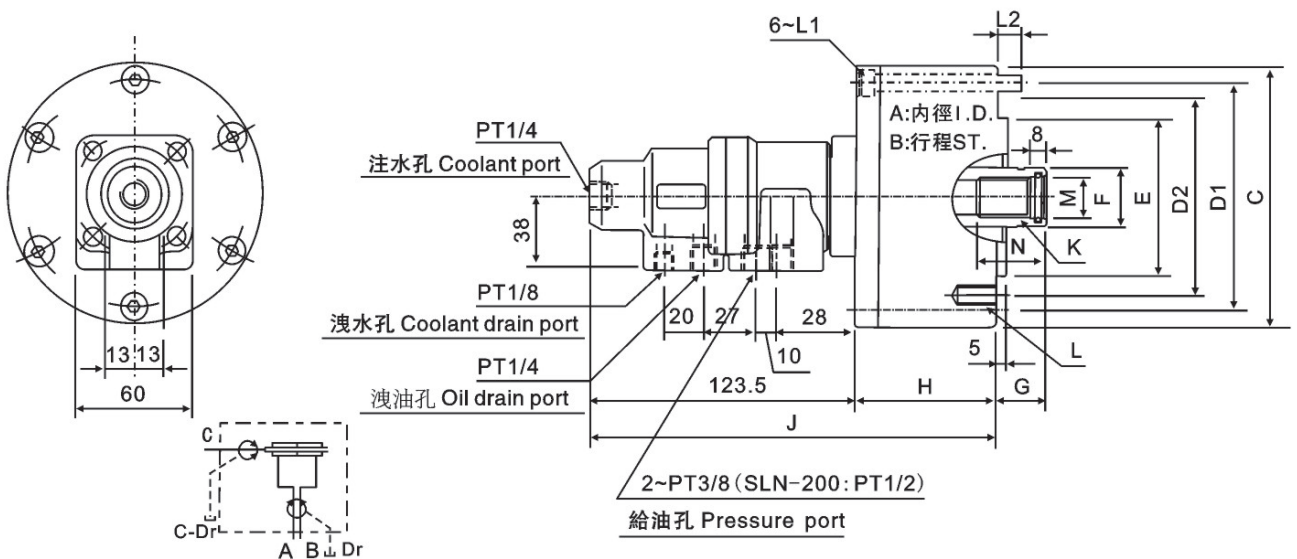

規格 Spec 型號 Model	活塞面積 Eff.piston area cm <sup>2</sup>		行程 (mm) Piston stroke	最高回轉速 max r.p.m	最高使用壓力 Mpa Max.pressure (kgf/cm <sup>2</sup> )	注水部最高使用壓力(kgf/cm <sup>2</sup> ) Mpa Coolant connection Max.pressure	慣性矩 kg·m <sup>2</sup>	重量 Weight (kg)
	押側 Extend	拉側 Retract						
SLN-75	42.6	37.1	15	6000	4.0(40)	3.5(35)	0.01	3.0
SLN-100	77.0	71.5	20					
SLN-125	121.2	113.1	25	5500			0.05	7.0
SLN-150	175.2	160.8	30					
SLN-200	312.5	290.4	35					

規格 Spec 型號 Model	A	B	C	D1	D2	E h7	F	G		H	J	K	L	L1	L2	M H8	N
								max	min								
SLN-75	75	15	107	90	65	30	45	30	57	180	M20x2.5	6~M8x16	M8x60			21	35
SLN-100	100	20	132	115	100	80	30	45	72	195	M20x2.5	6~M10x20	M8x75	12		21	35
SLN-125	125	25	160	140	130	110	35	50	82	205	M24x3.0	6~M12x20	M8x85			25	45
SLN-150	150	30	190	170	130	110	45	55	95	218	M30x3.5	12~M12x24	M10x100	16		31	45
SLN-200	200	35	245	220	145	120	55	70	115	240	M36x4.0	12~M16x30	M10x125	21		37	60

\* 保留技術更改的權利, 恕不另行通知 Subject to technology changes without prior information  
 \* 非標需求可訂做 Non-standard requirements can be made